



10/510904
10/510904
08 OCT 2004
INVESTOR IN PEOPLE

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 05 JUN 2003
WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

M. C. Jenkins

Dated 28 May 2003

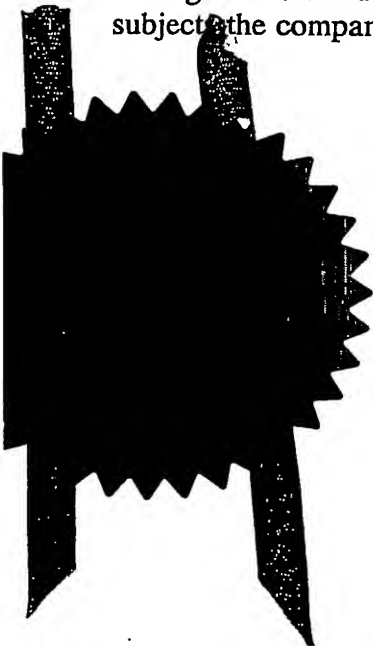

Patents Form 1/77

Patents Act 1977
(Rule 16)The
Patent
Office

THE PATENT OFFICE

12 APR 2002

112 APR 2002

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

RECEIVED BY FAX

1. Your reference

02.0028-Sen/P272/GB/AJW

2. Patent application number

(The Patent Office will fill in this part)

0208472.1

15APR02 E710719-1 063975

P01/7700 0.00-0208472.1

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Sendo International Limited
1601-3 Kinwick Center
32 Hollywood Road, Central, Hong Kong

Patents ADP number (if you know it)

8203135001

If the applicant is a corporate body, give the country/state of its incorporation

Hong Kong

4. Title of the invention

IMAGE OR VIDEO PROCESSING

5. Name of your agent (if you have one)

Antony Wray

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

INETIP
121 Blackberry Lane
Four Marks, Alton
Hampshire GU34 5DJDarius
GROVE HS
LYMEYS CLIFF
CHICHESTER
BASSINGSTON HANTS
7987423001 R924 845
084063944001

Patents ADP number (if you know it)

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (d)

Patents Form 1/77

10035864 12-APR-02 09:18

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

24 /

Claim(s)

5 /

Abstract

1 /

Drawing(s)

5 /

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

12 April 2002

12. Name and daytime telephone number of person to contact in the United Kingdom.

Antony Wray

01256 816233

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

0033864 12-Apr-02 09:11

DUPLICATE

P272/GB/Sen/Austin

- 1 -

IMAGE OR VIDEO PROCESSING**Field of the Invention**

5 This invention relates to a method of image or video processing in, for example, a portable electronic device such as a mobile communication device. The invention is applicable to, but not limited to, a display device used in a portable electronic device, such as a personal
10 digital assistant (PDA) or mobile phone, where battery power to operate and refresh the display with new images is limited.

Background of the Invention

15 Future generation mobile and fixed communication systems are expected to provide the capability for video and image transmission, as well as the more conventional voice and data services. As such, video and image
20 communication will become more prevalent, and improvements in video/image compression technology are likely to be needed in order to satisfy the consumer demand within the available communication bandwidth.

25 Furthermore, as mobile users wish to access ever more services whilst on the move, such as text strings, text messages, email, images and/or video, similar improvements are required for display technologies. Given the current user trend towards desiring smaller,
30 lighter and more portable wireless communication devices,

P272/GB/Sen/Austin

- 2 -

the improvement to displays is considered a particularly key market differentiator for manufacturers.

In the field of portable electronic devices capable of displaying images, for example by way of liquid crystal displays (LCDs), it is often necessary for the image data to be pre-processed prior to being displayed, or prior to being provided to the device. One reason for such pre-processing may be due to the initial image data being unsuitable for the particular display of the device.

Alternatively, the display may be capable of operating in more than one mode, for example a first mode of operation for displaying high quality images and a second mode of operation for reduced power consumption. In such a dual-mode situation, although the initial image data may be suitable for the first mode of operation, it may be unsuitable for the second mode of operation.

One known method of defining an image using binary data is for the image to be divided up into pixels. Each pixel is then defined by a string of, for example, sixteen bits. For colour displays using red-green-blue (RGB) colour definition, pixels have individual fields allocated for three components, namely one for each primary colour. A common example is to define a 16-bit pixel word with, for example, 5 bits allocated for red coloured pixels, 6 bits allocated for green coloured pixels and 5 bits allocated for blue coloured pixels. This allows a range of 65,536 (2^{16}) colours to be used when displaying an image.

P272/GB/Sen/Austin

- 3 -

However, many displays are only capable of displaying a range of, for example, 512 (2^9) colours, defined by 9 bits where each of the primary colour components red, green and blue are defined by three bits each. Therefore, before the image can be displayed, it is necessary to process the image data such that the data representing each pixel is converted from 16 bits down to 9 bits.

10

Reducing the number of bits used to represent each pixel has the advantage that the amount of memory required to store the image data is reduced. Furthermore, when transmitting the image data over a bandwidth-limited network, for example over a wireless cellular communications network, a public switched telephone network (PSTN), computer network, infrared interface, etc., the time taken to transmit the data is reduced.

20 A known method for reducing the number of bits used to represent a pixel from sixteen to nine is known and referred to as truncation, or rounding down. With this method, the number of bits representing each colour component is simply reduced to three bits by discarding the least significant bits (LSBs) of each colour component. Thus, for each pixel, the sixteen bits are divided into the three parts representing the three colour components red, green and blue. For the five bits representing red, the two of least significance are discarded, leaving only the three of most significance. For the six bits representing green, the three bits of

25
30

P272/GB/Sen/Austin

- 4 -

least significance are discarded, leaving only the three of most significance. For the five bits representing blue, the two bits of least significance are discarded, leaving only the three of most significance. The
5 resulting nine bits, three for each colour components, are then combined to define the entire pixel.

However, although this method provides a simple means of reducing the number of bits representing each pixel from
10 sixteen to nine, the quality of the resulting image is noticeably affected, as bits that determine a pixel's colour are discarded. Although the poor image quality is partly due to the number of colours available for
displaying the image being reduced from 65,536 to 512,
15 the deterioration of the image is increased due to data being discarded and lost for each colour component during truncation. In particular, such image deterioration causes significant visible contouring of the image, which is undesirable to a user viewing the display.

20

Thus, a need exists for an improved image processing mechanism for a display, wherein the abovementioned disadvantages may be alleviated.

25 **Statement of Invention**

In accordance with a first aspect of the present invention, there is provided a method for processing image or video data for a display, as claimed in Claim 1.

30

P272/GB/Sen/Austin

- 5 -

In accordance with a second aspect of the present invention, there is provided an image or video processing system, as claimed in Claim 11.

- 5 In accordance with a third aspect of the present invention, there is provided a display driver for refreshing an image of a display device, as claimed in Claim 12.
- 10 In accordance with a fourth aspect of the present invention, there is provided a storage medium storing processor-implementable instructions for controlling one or more processors, as claimed in Claim 13.
- 15 In accordance with a fifth aspect of the present invention, there is provided an image or video communication device having a display, as claimed in Claim 14.
- 20 In accordance with a sixth aspect of the present invention, there is provided a video or image communication device, as claimed in Claim 15.

Further aspects of the present invention are as defined
25 in the dependent Claims.

In summary, an image communication device and method for processing image or video data for a display are described whereby a bit truncation process is improved by
30 reusing discarded bits to improve the quality of the image generated from non-discarded bits. The improvement

P272/GB/Sen/Austin

- 6 -

is achieved by using the discarded bits to modify the bit values of the non-discarded bits of pixels or blocks of pixels.

5 Brief Description of the Drawings

Exemplary embodiments of the present invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

10

FIG. 1 shows a block diagram of a battery-powered wireless subscriber unit, adapted to support the inventive concepts of the preferred embodiments of the present invention;

15

FIG. 2 illustrates a block diagram of a liquid crystal display (LCD) control/driver circuit, adapted to support the inventive concepts of the preferred embodiments of the present invention;

20

FIG. 3 shows a pixel array representing an image;

FIG. 4 illustrates data representing an image formed into an array of pixel blocks in accordance with the preferred
25 embodiments of the present invention;

FIG. 5 illustrates data representing an image in a block from the array of pixel blocks of FIG. 4;

30 FIG. 6 illustrates pixel data of an image for one pixel;

P272/GB/Sen/Austin

- 7 -

FIG. 7 illustrates pixel data of a colour component, where the data is to be truncated in accordance with the preferred embodiments of the present invention;

- 5 FIG. 8 illustrates blocks of pixel data of a colour component, where non-discarded bits are modified using discarded bits in accordance with the preferred embodiments of the present invention; and
- 10 FIG. 9 illustrates a flowchart of the preferred embodiments of the present invention.

Description of Preferred Embodiments

- 15 The preferred embodiment of the present invention is described with reference to a portable cellular phone capable of operating in, for example, a current or future generation of wireless cellular technology. However, it is within the contemplation of the present invention that
- 20 the inventive concepts described herein are equally applicable to any other video or image display device, such as a personal data assistant (PDA), a portable or mobile radio, a laptop computer or a wirelessly networked personal computer (PC) or indeed any other digital device
- 25 having a display to support video/image transmissions.

Referring first to FIG. 1, there is shown a block diagram of a cellular subscriber unit 100 adapted to support the inventive concepts of the preferred embodiments of the

30 present invention. The cellular subscriber unit 100 contains an antenna 102 preferably coupled to a duplex

P272/GB/Sen/Austin

- 8 -

filter, antenna switch or circulator 104 that provides isolation between receiver and transmitter chains within the subscriber unit 100.

5 The receiver chain, as known in the art, includes scanning receiver front-end circuitry 106 (effectively providing reception, filtering and intermediate or base-band frequency conversion). The scanning front-end circuit 106 is serially coupled to a signal processing
10 function 108. An output from the signal processing function 108 is provided to a suitable output device 110, such as a screen or flat panel liquid crystal display. The screen or flat panel display 110 includes a display driver circuit 111.

15

The receiver chain also includes received signal strength indicator (RSSI) circuitry 112, which in turn is coupled to a controller 114 for maintaining overall subscriber unit control. A timer 118 is operably coupled to the
20 controller 114 to control the timing of operations (including transmission or reception of time-dependent signals) within the cellular subscriber unit 100. The controller 114 is also coupled to the scanning receiver front-end circuitry 106 and the signal processing
25 function 108 (generally realised by a DSP) for receiving a transmitted video or image signal.

The controller 114 may therefore receive bit error rate (BER) or frame error rate (FER) data from recovered
30 information. The controller is also coupled to a memory

P272/GB/Sen/Austin

- 9 -

device 116 that stores operating regimes, such as decoding/encoding functions and the like.

In accordance with the preferred embodiment of the present invention, the processor 108 performs bit-truncation on pixel blocks of a received image, preferably on a per colour basis. In cooperation with the display driver circuit 111, the processor 108 and display driver 111 have been adapted such that any bits to be discarded in the truncation process are reused to dynamically adapt a respective colour of a pixel in an image refresh operation. In particular, the bits that are to be discarded are reused to modify one or more bits that survive the truncation process to enable a more accurate colour shade to be displayed.

It is within the contemplation of the invention that the inventive concepts described herein apply equally to images or video received by the communication unit, or previously stored within the communication unit for subsequent display.

FIG. 2 illustrates a block diagram of a liquid crystal display (LCD) control/driver circuit 200, adapted in accordance with the preferred embodiment of the present invention. A microprocessor, for example the microprocessor 108 of FIG. 1, initialises an LCD controller 140 and a DMA controller 220 by way of control registers 132. The microprocessor 108 manages the contents of image memory 210 via an address bus 134 and a data bus 136.

P272/GB/Sen/Austin

- 10 -

The LCD controller 140 is also connected to an LCD panel 110 by way of a timing link 142 that provides, inter-alia, timing signals such as horizontal (H)-sync, vertical (V)-sync and pixel clock. The DMA controller drives pixel data bus 144, by way of a data latch 240, to provide pixel data to the LCD panel 110. For the illustrated embodiment there is also provided a connector 140 between the LCD controller 140 and the LCD panel 110. The LCD panel 110 includes an LCD display and control circuitry (not shown).

The LCD controller 140 also provides timing control signals to the LCD panel 110, the DMA controller 220 and the data latch 240 to coordinate the retrieval and making available of pixel data. The DMA controller 220 retrieves pixel data for the image to be displayed from the memory device 210 via address bus 134 and data bus 136. The pixel data retrieved from the memory is then passed to a data latch 240.

The LCD panel 110 receives the timing signals provided by the LCD controller 140 and, in response to the timing signals, retrieves the data for each pixel. In accordance with the preferred embodiment of the present invention, such pixel data contains a truncated number of bits for each primary colour, with the discarded bits in the truncation process having been used by the microprocessor 108 to modify the truncated bit sequence. The LCD panel 110 then systematically displays the corresponding image one pixel at a time.

P272/GB/Sen/Austin

- 11 -

It is envisaged that the original image data could be obtained by the microprocessor 108 and processed, the processed data then loaded into the memory 210 for displaying immediately. However, a preferred alternative, in order to prevent delays in displaying images, is that the original image data is processed, by microprocessor 108 (or another processor) and stored in an area of memory, such as memory element 210 (or another memory element) for later displaying. When the processed image is to be displayed, assuming that it is stored in memory element 210, the microprocessor 108 may simply initialise the LCD controller 140 and DMA controller 220 to locate the processed image data. Alternatively, if the data is located in another memory element the microprocessor 108 fetches the data, stores it in memory element 210 and then initialises the LCD controller and DMA controller.

It will be appreciated that the LCD control/driver circuit 200 illustrated in FIG. 2 is only an example of a suitable LCD driver circuitry apparatus, and that any other suitable circuitry known may alternatively be adapted to facilitate and perform the inventive concepts described herein.

It is within the contemplation of the invention that the microprocessor 108 and/or microprocessor memory element 210 of the cellular subscriber unit 100 (or other video/image device) may be re-programmed with an algorithm (such as that described with respect to FIG. 9)

P272/GB/Sen/Austin

- 12 -

supporting the inventive concepts of the present invention, as described below. More generally, according to the preferred embodiment of the present invention, such re-programming to dynamically re-use discarded bits from a bit-truncation process may be implemented in a respective cellular subscriber unit 100 (or other video/image device) in any suitable manner. For example, a new memory chip or processor may be added to a conventional cellular subscriber unit 100 (or other video/image device). Alternatively, such re-programming may be configured to perform discarded bit reuse on an image or video file and saved for displaying at a later time.

Alternatively, existing parts of a conventional cellular subscriber unit 100 (or other video/image device) may be adapted, for example by reprogramming one or more processors therein. As such, the required adaptation may be implemented in the form of processor-implementable instructions stored on a storage medium, such as a floppy disk, hard disk, programmable ROM (PROM), RAM or any combination of these or other storage media.

The image data may be processed according to the present invention by the microprocessor 108 prior to being stored in the associated memory 210. In this way, the pixel data requires no further processing before being made available to the LCD panel 130. However, it is within the scope of the present invention for the processing to be carried out prior to being received by the microprocessor 108 and stored in the memory 210.

P272/GB/Sen/Austin

- 13 -

For display technologies, it will be appreciated that the image data initially provided to the device containing the display, for example the LCD panel 110, may be in a format unsuitable to display the image correctly. Hence, in accordance with the present invention the image data may require a truncation process prior to being provided to the display.

For example, let us assume that data representing an image 300 defines the characteristics of each pixel 310 of the image 300, as illustrated in FIG. 3. Sixteen bits define each pixel of the initial image data 300, where the sixteen bits are divided into three primary colour components: five defining red; six defining green; and five defining blue. In order for the image to be displayed on say, the LCD panel 110 of the cellular subscriber unit 100, let us assume that it is necessary for the data to be converted such that characteristics of each pixel are defined using a reduced number of bits, for example nine bits.

It is envisaged that the characteristics of each pixel may need to be defined in a reduced number of bits due to a need for the display to operate in a reduced power consumption mode, for example to reduce the number of data-line transitions. Alternatively, the display may be of a design that cannot handle the image data in the sixteen-bit format, but may be able to handle, say, a reduced nine-bit pixel characteristic format.

P272/GB/Sen/Austin

- 14 -

In accordance with the preferred embodiment of the present invention, and as illustrated in FIG. 4 and FIG. 5, the image data is preferably divided into blocks 420, which for the illustrated embodiment each comprise four pixels 410 arranged two-by-two. The pixel data is converted from sixteen bits per pixel, to nine bits per pixel a block at a time, in the following manner.

FIG. 6 illustrates the pixel data of the initial image data for one pixel, comprising sixteen bits. The first five bits (R0 to R4) define the red colour component of the pixel, the next six bits (G0 to G5) define the green colour component of the pixel, and the final five bits (B0 to B4) define the blue colour component of the pixel.

The pixels 410 within the block 420 are divided into their respective colour components, and rounded down (or truncated) to three bits to provide the baseline values 720, as illustrated in FIG. 7. In this manner, for each colour component, the respective number of lesser significant bits are discarded, for example R3 and R4 for the red colour component.

In contrast to known truncation mechanisms, the preferred embodiment of the present invention utilises these discarded bits 730 of each pixel within the block. In particular, the discarded bits 730 of each pixel are subsequently used to determine an offset for the respective colour component. In turn, the offset is used to determine the number of pixels within the block for

P272/GB/Sen/Austin

- 15 -

which the baseline value of that colour component is to be corrected.

In this way, the colour component baseline value may be obtained, for example in the same manner as for a known truncation method. However, advantageously, the colour data within the block may be improved by modifying the colour component baseline value in response to the binary values of the discarded bits 730. In this manner, the discarded bits 730 are effectively reused and redistributed among the pixels.

For example, the discarded bits 730 of each pixel within the block, for example R3 and R4 for the red colour component are added together to produce the offset for that colour component. This offset value is subsequently divided by n^2 , where n is the number of bits discarded 730 for each pixel to obtain the baseline values. Therefore for the illustrated embodiment for the red colour component, n^2 equals four.

The preferred embodiment of the present invention is described with respect to bit manipulation in a binary format. Consequently, the correction value is preferably set to 1, such that the three-bit baseline colour component value is incremented in a binary format by '1'.

In a yet further preferred embodiment of the present invention, in order to obtain the baseline values for a colour component within the block, the colour components

P272/GB/Sen/Auslin

- 16 -

of the initial pixel data for that block are added together and divided by the number of pixels to provide an average colour component value. This average colour component value is then truncated to three bits to
5 provide the baseline value for all pixels within the block. Thus, all pixels within the block comprise the same baseline values derived from average colour component values. The bits discarded through truncation of the average colour component value are subsequently
10 used to obtain the offset value.

Since the discarded bits 730 are discarded from the average colour component value across a number of blocks of pixels, the values of the discarded bits (n) will be
15 the same for each pixel in a block, due to the use of an average colour component. In determining the number of pixels to be "corrected", an offset value is calculated, which is the value(s) of discarded bits for each pixel added together. Therefore, when using the average colour
20 component, the offset value equates to the binary value of the discarded bits 730 from the average colour component value (i.e. from one pixel) multiplied by the number of pixels in the block. If we define the number of pixels as "X" and the value of discarded bits from the
25 average as "VAL", the offset value may be written as:

$$\text{OFFSET} = X * \text{VAL}$$

[1]

Once the offset value is calculated, it can be used to
30 determine the number of pixels to "correct", by dividing it by n^2 , where n is the number of bits discarded. Thus:

P272/GB/Sen/Austin

- 17 -

$$\text{No. of pixels to be corrected} = X \cdot \text{VAL} / n^2 \quad [2]$$

For the described example, both X (number of pixels) and
5 n^2 , equal '4' (namely $2 \cdot 2$). Therefore, and
advantageously, X and n^2 are configured to have the same
value and thereby cancel each other out, leaving 'VAL'.

Therefore, as illustrated in FIG. 8, when the discarded
10 bits 730 have the binary values '00' in configuration
810; the baseline value for none of the pixels is
corrected. Where the discarded bits have the binary
values '01' in configuration 820, the correction value is
added to the baseline value for one of the pixels in the
15 block. Where the discarded bits have the binary values
'10' in configuration 830, the correction value is added
to the baseline value for two of the pixels in the block.
Where the discarded bits have the binary values '11' in
configuration 840, the correction value is added to the
20 baseline value for three of the pixels in the block.

The preferred embodiment of the present invention
implements this as follows, where the least significant
of the discarded bits has a value of '1', which for the
25 red colour component is R4, the correction value is added
to the baseline value for the bottom right pixel. Where
the LSB-but-one has a value of '1', which for the red
colour component is R3, the correction value is added to
the baseline value for the bottom left pixel and the top
30 right pixel.

P272/GB/Sen/Austin

- 18 -

In accordance with the preferred embodiment of the present invention, if the three-bit baseline value (R0 to R2) has a binary value of '111', the correction value is
5 not added to the baseline value, in order to prevent bit-rollover. In this manner, a more accurate representation of the colour to be displayed is achieved.

In areas of the image where there is a relatively large
10 amount of detail, it is preferable not to take the average colour component value to obtain the baseline value of the colour components, since this will affect the detail of the image. In fact, the problems encountered through truncation such as contouring are
15 generally not visible in areas of relatively high detail. Hence, in accordance with the preferred embodiment of the present invention, it is envisaged that the above-described inventive concepts are applied in regions of low detail.

20

In order to determine when a block of pixels is part of an area of high or low level of detail, the luminance range for that block can be used. This may be achieved by obtaining the luminance value for each pixel within
25 the block. If the range of these luminance values is greater than a certain threshold, for example '2', then the block of pixels may be determined as residing within an area of relatively high detail. In this scenario, normal truncation may be used. Otherwise, the method of
30 the present invention is used to convert the pixel data from say, sixteen bits to nine bits.

P272/GB/Sen/Austin

- 19 -

The luminance value (L) from RGB colour components for each pixel is preferably obtained using the following equation, by the international standard (ITU-R BT.601):

5

$$L = 0.229R + 0.587G + 0.114B \quad [3]$$

Where:

10 R is the decimal value for the red colour component of the pixel,

G is the decimal value for the green colour component of the pixel, and

B is the decimal value for the blue colour component of the pixel.

15

The resulting value for 'L' is generally used by monochrome monitors to represent an RGB colour. Each pixel in the block provides its own luminance value. The greater the range of these values, the more detail there is likely to be in the block. Hence, in the preferred embodiment of the present invention, following extensive testing on 'text' images by the inventors of the present invention, a threshold value of "L=2" has been selected.

25 Referring now to FIG. 9, a flow chart 900 of the preferred method of implementing the present invention on a block of pixels, is illustrated. It is envisaged that the hereinafter method steps may be performed, for example, by microprocessor 108 of cellular subscriber unit 100. In the preferred embodiment, the pixel data is being converted from say, sixteen bits to nine bits.

P272/GB/Sen/Austin

- 20 -

The method starts in step 905 by extracting the colour components for each pixel in the block. For the red and blue colour components, of the preferred 16-bit
5 embodiment of the present invention, all five bits are obtained. However, for the green colour component, which comprises six bits, only the first five (more significant) bits are obtained. The sixth least significant bit is preferably omitted, in order to
10 simplify the process.

Next the luminance for each pixel is preferably calculated, as shown in step 910. If the luminance range is greater than a predetermined threshold in step 915,
15 for example greater than a luminance value of '2', the pixel data for each pixel in the block is truncated in the normal manner, as in step 920. The process is then repeated for the next block of pixels, as shown in step
20 925.

If the luminance range is less than or equal to the threshold in step 915, for each colour component, the average value for the block is calculated, as shown in step 930. The baseline value for each colour component
25 is then determined by truncating the average value to say, three bits, as in step 935. Any discarded bits from the truncation process are held/stored, to be potentially used in modifying non-discarded bits. The colour component for each pixel is then set to be equal to the
30 baseline value in step 940.

P272/GB/Sen/Austin

- 21 -

Preferably, if the baseline value has a binary value of '111' in step 945, the discarded bits are truly discarded, and the process is repeated for the next block of pixels.

5

Otherwise, for each colour component, the least significant bit of the two bits discarded, when determining the baseline value, is assessed to see if it has a logical value of '1', in step 950. If this first, 10 least significant bit of the two discarded bits has a logical value of '1' in step 950, a logical/binary '1' is added to the baseline value of the bottom right pixel in the block in step 955. In addition, if the second (LSB plus one) bit has a logical value of '1' in step 960, a 15 logical/binary '1' is (also) added to the baseline value of each of the bottom left pixel and the top right pixel, as shown in step 965. The process is then repeated for the next block of pixels, as in step 970.

20 It will be appreciated that the pattern in which the baseline values are corrected dependant on the values of the discarded bits is only exemplary, and may be varied in any suitable manner. In fact, it is preferable for the pattern to be altered, for example flipped or rotated 25 by 90 degrees, for each colour component in order to further redistribute the corrections throughout the block.

In embodiments that have a limited number of pixels 30 within a block, the variation in how any corrections can be redistributed throughout the block is limited,

P272/GB/Sen/Austin

- 22 -

especially for a block of '2x2'. When correcting two pixels, it is therefore preferable to correct two diagonally opposite pixels in order to avoid weighting one side.

5

A skilled artisan would appreciate that any display or video/image processing arrangement or video or image communication device that employs truncation or rounding down can benefit from the inventive concepts hereinbefore described. As such, the invention should not be viewed as being limited to the display, communication device or truncation of 16-bits to 9-bits, as described in the preferred embodiment.

15 The inventors of the present invention have also quantified examples of the improvements provided by the inventive concepts hereinbefore described. For example, root mean square bit errors (rmse) were calculated for both an original image truncated as normal, and one where
20 the image was processed as described above.

Image truncated as normal:

rmse = 18.6(R) 19.3(G) 22.1(B);

as compared to the same image processed in accordance
25 with the hereinbefore described inventive concepts:

rmse = 16.8(R) 17.6(G) 21.7(B).

Clearly, the error associated with the image processing is greatly improved using the hereinbefore-described
30 inventive concepts. It is also noteworthy that by rotating the distribution of corrections for the

P272/GB/Sen/Austin

- 23 -

different colour components the luminance rmse also improved, as illustrated below:

Image processed using the hereinbefore-described
5 inventive concepts with a rotated distribution:

$$\text{rmse} = 13.2(L);$$

as compared to the same image processed using the hereinbefore described inventive concepts with a static distribution:

10 $\text{rmse} = 13.9(L).$

In summary, a method and apparatus for processing image or video data for a display have been described whereby a stream of image or video data is separated into a first
15 sequence of pixel bit values for a colour component of the image or video and one or more discarded bits. A binary value of the one or more discarded bits is determined and the first sequence of pixel bit values is modified in response to the determined binary value of
20 the one or more discarded bits. In this manner, a reduced number of pixel bit values is formed to represent the colour component of a pixel.

In the context of the present invention, the expression
25 'separating a stream of image or video data' should not be construed as being limited to real-time data. It is a feature of the present invention that the inventive concepts hereinbefore described applies equally to image data retrieved from a file stored in memory. It is also
30 a feature of the present invention that the inventive concepts hereinbefore described apply equally to static

P272/GB/Sen/Austin

- 24 -

images, since video images will require a higher quality of image, and so will use full 16-bit or 32-bit data.

It will be understood that the improved method of image processing described above provides at least the following advantages:

(i) Colour information discarded when truncating the colour components to, say, three bits is reused within the block of pixels, improving the image quality and helping to significantly reduce effects such as contouring.

(ii) Improvement in image quality is achieved as all the advantages of using a truncation approach apply and, indeed, are enhanced.

Whilst the specific and preferred implementations of the embodiments of the present invention are described above, it is clear that one skilled in the art could readily apply variations and modifications of such inventive concepts.

Thus, a communication device with a display and method for improving a truncated image of a display have been described where the aforementioned disadvantages with prior art arrangements have been substantially alleviated.

P272/GB/Sen/Austin

- 25 -

Claims

1. A method for processing image or video data for a display, the method comprising the step of:

- 5 separating a stream of image or video data into a first sequence of pixel bit values for a colour component of said image or video and one or more discarded bits; the method characterised by the steps of:

10 determining a binary value of said one or more discarded bits; and

 modifying said first sequence of pixel bit values in response to said determined binary value of said one or more discarded bits to form a reduced number of pixel bit values to represent said colour component of a pixel.

15

2. The method for processing image or video data for a display according to Claim 1, the method further characterised by the step of:

20 determining an average colour component for one or more colours of said stream of image or video data, wherein a number of said first sequence of pixel bit values represents a number of respective baseline colour component values of a pixel.

- 25 3. The method for processing image or video data for a display according to Claim 2, wherein the step of determining an average colour component includes the step of:

30 adding a number of colour components from a block of pixel data from said stream of image or video data to form a colour component pixel value; and

P272/GB/Sen/Austin

- 26 -

dividing said colour component pixel value by the number of pixels to provide an average colour component value.

- 5 4. The method for processing image or video data for a display according to Claim 2 or Claim 3, the method further characterised by the step of:

truncating said average colour component value by discarding one or more lesser significant bits to obtain
10 a reduced number of bits forming said first sequence of pixel bit values for pixels within a block.

5. The method for processing image or video data for a display according to any preceding Claim, wherein the
15 step of modifying includes modifying a bit of higher significance within said first sequence of pixel bit values with said one or more discarded bits of lesser significance.

- 20 6. The method for processing image or video data for a display according to any preceding Claim, wherein said step of determining a binary value of said one or more discarded bits includes determining an offset for said
25 respective colour component based on said one or more discarded bits, where said offset is used to determine the number of pixels within the block for which the baseline value of that colour component are to be modified.

P272/GB/Sen/Austin

- 27 -

7. The method for processing image or video data for a display according to Claim 6, the method further characterised by the step of:

5 dividing the offset value by a multiple of the number of discarded bits to indicate the number of pixels within the block for which a correction value is to be added to the baseline value of that colour component.

8. The method for processing image or video data for a display according to any preceding Claim, the method further characterised by the step of:

10 omitting said step of modifying when said first sequence of pixel bit values comprises a series of binary '1's, to avoid a bit-rollover when modifying said first sequence of pixel bit values.

9. The method for processing image or video data for a display according to any preceding Claim, the method further characterised by the steps of:

20 determining a level of image detail in an image area of said stream of image or video data; and applying said steps of determining a binary value of said one or more discarded bits and modifying said first sequence of pixel bit values in response to determining a low level of image detail.

10. The method for processing image or video data for a display according to Claim 9, wherein said step of determining a level of image detail includes determining a luminance value for a number of pixels within a block of pixels, such that if the luminance value is below a

P272/GB/Sen/Austin

- 28 -

threshold then the block of pixels are determined as residing within a low level of image detail.

11. An image or video processing system, adapted to
5 perform the method steps of any of Claims 1 to 10.

12. A display driver for refreshing an image of a display device, wherein the display driver is adapted to perform the method steps of any of Claims 1 to 10.

10

13. A storage medium storing processor-implementable instructions for controlling one or more processors to carry out the method of any of claims 1 to 10.

15 14. An image or video communication device having a display adapted to perform the method steps of any of Claims 1 to 10.

15. A video or image communication device, the device
20 comprising:

a display for displaying an image;
a processor, operably coupled to said display, for processing said image to be displayed wherein said processor is configured to separate a stream of image or
25 video data into a first sequence of pixel bit values for a colour component of said image or video and one or more discarded bits, determine a binary value of said one or more discarded bits, and modify said first sequence of pixel bit values in response to said determined binary
30 value of said one or more discarded bits to form a

P272/GB/Sen/AusLin

- 29 -

reduced number of bit values that represent said colour component of a pixel.

16. The image or video communication device according to Claim 14 or Claim 15, wherein the device is one of:

a cellular phone, a portable or mobile radio, a personal digital assistant, a laptop computer, a wirelessly networked PC.

- 10 17. An image or video communication device, having a display, substantially as hereinbefore described with reference to, and/or as illustrated by, FIG. 1 or FIG. 2 of the accompanying drawings.

- 15 18. A method for processing image or video data for a display substantially as hereinbefore described with reference to, and/or as illustrated by, FIG. 9 of the accompanying drawings.

P272/GB/Sen/Austin

- 30 -

IMAGE OR VIDEO PROCESSING**Abstract**

5 A method (900) for processing image or video data for a
display includes separating (905, 920) a stream of image
or video data into a first sequence of pixel bit values
for a colour component of said image or video and one or
more discarded bits, determining (950, 960) a binary
10 value of said one or more discarded bits, and modifying
(955, 965) said first sequence of pixel bit values in
response to said determined binary value of said one or
more discarded bits to form a reduced number of pixel bit
values to represent said colour component of a pixel.

15


This provides the advantage over known methods such as
truncation in that colour information typically lost when
discarding pixel bit values is reused to improve the
image quality and reduce effects such as contouring in a
20 displayed image.

{FIG. 9 to accompany abstract}

P272/GB/Sen/Austin


1/5

FIG. 1

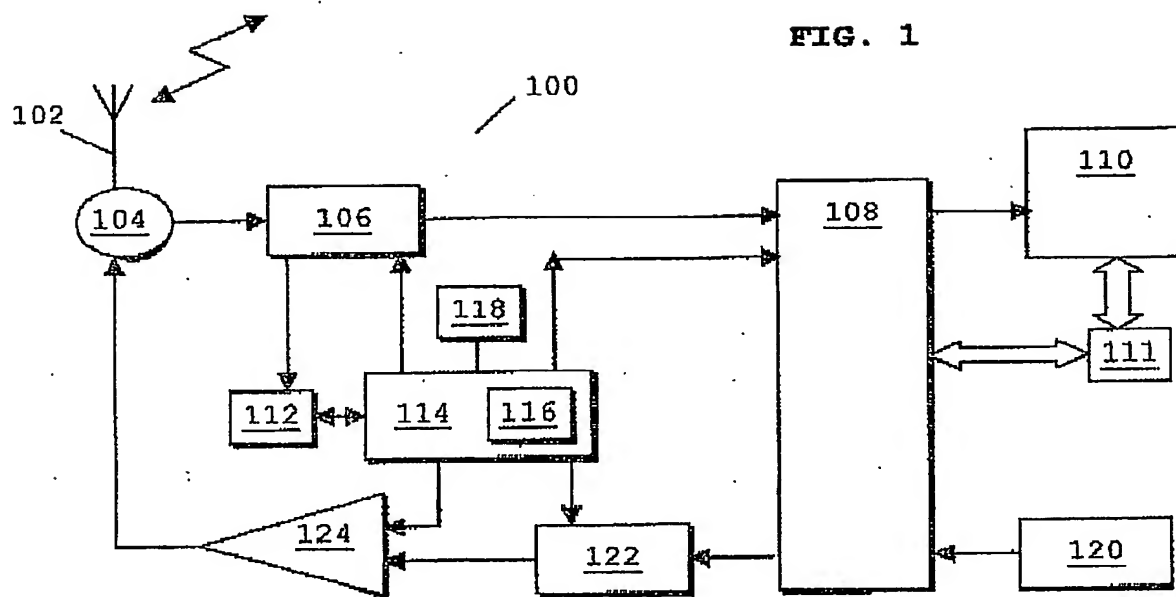

P272/GB/Sen/Austin

2/5

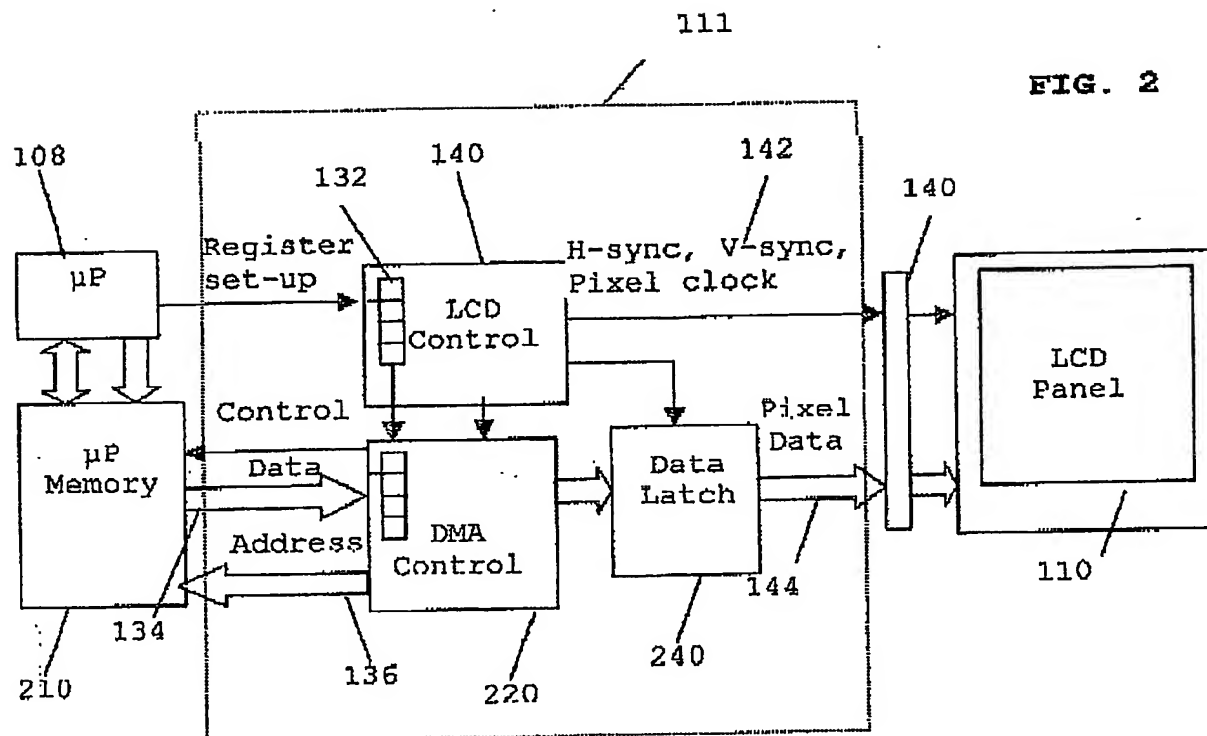

P272/GB/Sen/Austin

3/5

FIG. 3

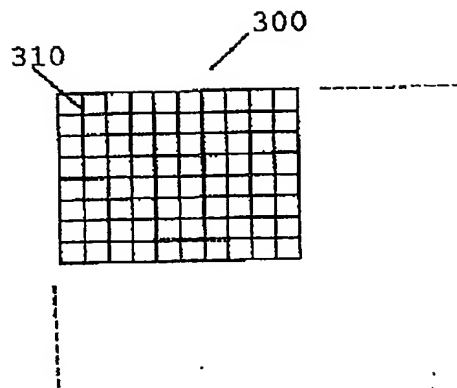


FIG. 4


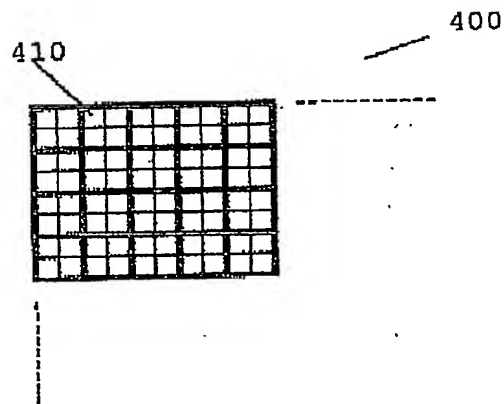


FIG. 5

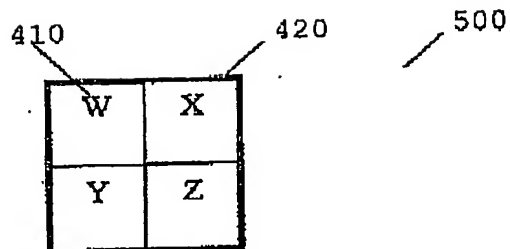


P272/GB/Sen/Austin

4/5


600

FIG. 6




700

FIG. 7

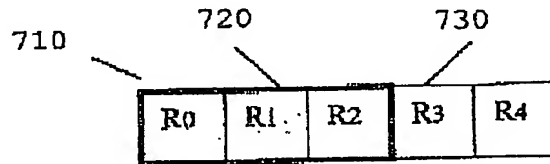


800

FIG. 8

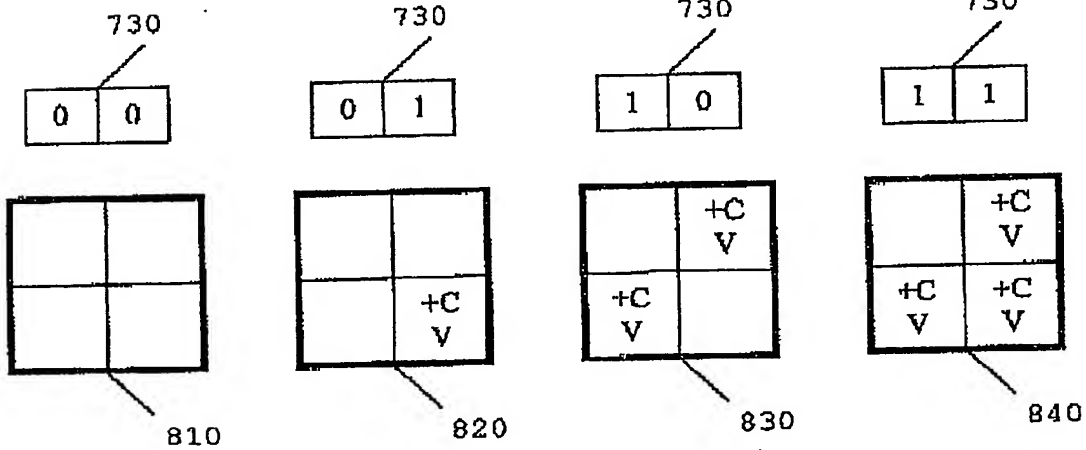

P272/GB/Sen/Austin

5/5

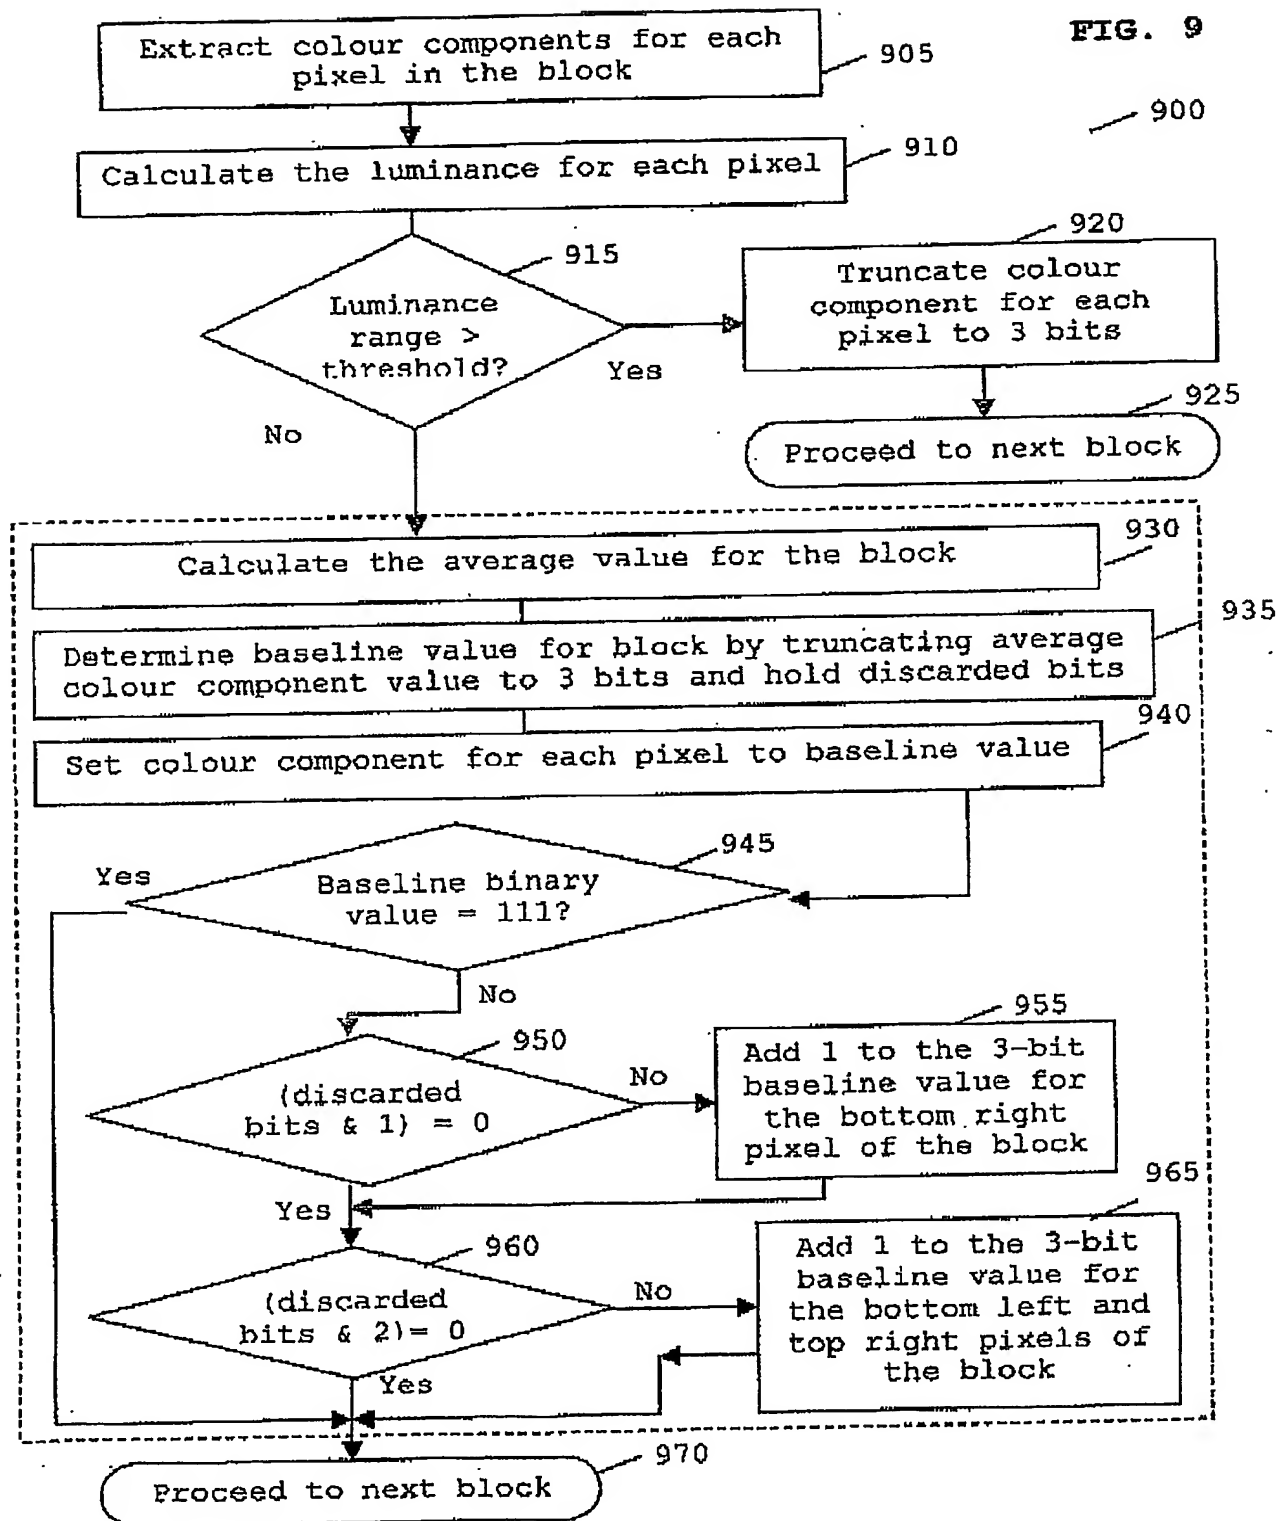

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☒ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.